


MDA Series







FEATURES

-
- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
-
- 100% Lead(Pb)-Free and RoHS compliant.
-
-
-

APPLICATION










-
- HVAC
-
- Audio subsystem
- Digital instrument cluster
-





MDA1050-R36M	0.36	±20%	34.0	30.0	52.0	46.0	0.82	0.92	3.0±0.3
MDA1050-R47M	0.47	±20%	33.0	29.0	46.0	40.0	1.15	1.32	3.0±0.3
MDA1050-R68M	0.68	±20%	28.0	25.0	35.0	32.0	1.60	1.90	2.5±0.3
MDA1050-1R0M	1.00	±20%	25.0	23.0	33.0	30.0	2.60	3.00	2.5±0.3
MDA1050-1R5M	1.50	±20%	23.0	21.0	27.0	24.0	3.40	3.80	2.5±0.3
MDA1050-2R2M	2.20	±20%	19.5	17.5	20.0	18.0	5.10	5.60	3.0±0.3
MDA1050-3R3M	3.30	±20%	17.0	15.0	17.5	15.5	8.10	9.10	3.0±0.3
MDA1050-4R7M	4.70	±20%	15.0	13.0	16.0	14.0	9.30	10.5	3.0±0.3
MDA1050-5R6M	5.60	±20%	13.0	11.0	15.0	12.5	12.8	14.4	3.0±0.3
MDA1050-6R8M	6.80	±20%	12.0	10.0	14.0	12.0	15.0	17.3	3.0±0.3
MDA1050-8R2M	8.20	±20%	10.0	8.5	13.5	11.5	16.1	18.8	3.0±0.3
MDA1050-100M	10.0	±20%	7.6	7.2	13.0	11.0	18.9	21.8	3.0±0.3
MDA1050-150M	15.0	±20%	6.5	6.0	8.5	7.5	32.0	39.0	3.0±0.3
MDA1050-220M	22.0	±20%	6.0	5.5	6.0	5.5	44.0	54.0	3.0±0.3

MDA1050-330M	33.0	±20%	5.5	5.0	5.8	5.2	74.0	86.0	3.0±0.3
MDA1050-470M	47.0	±20%	4.5	4.0	4.0	3.5	106	127	3.0±0.3


△

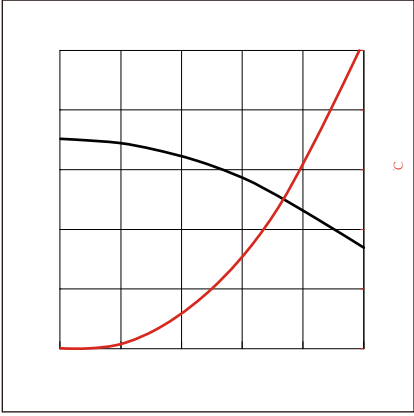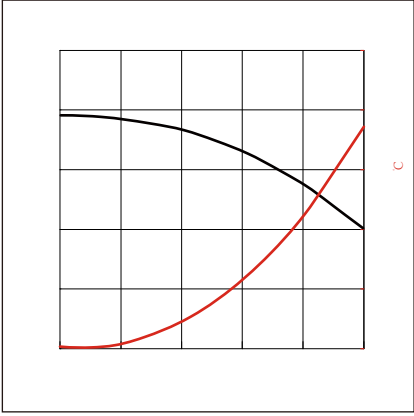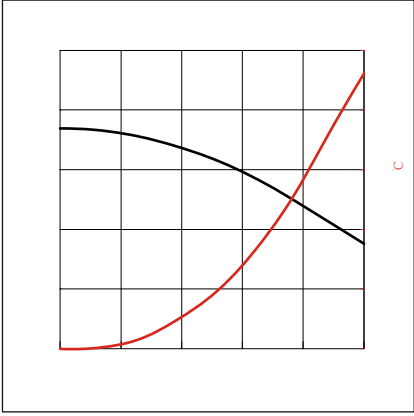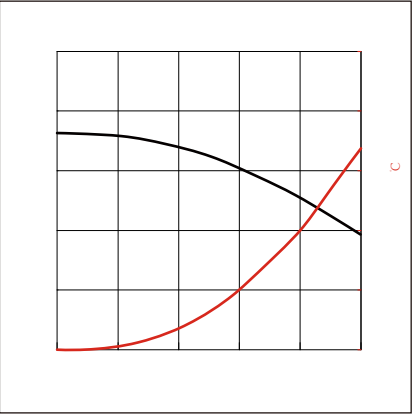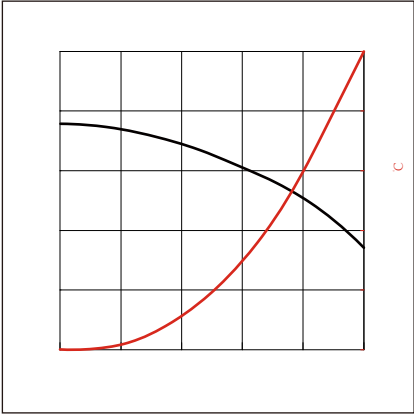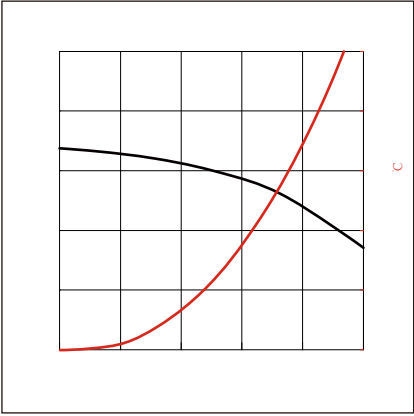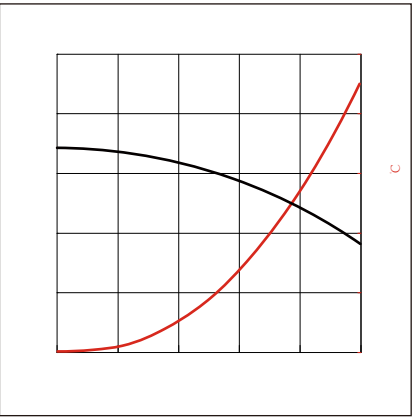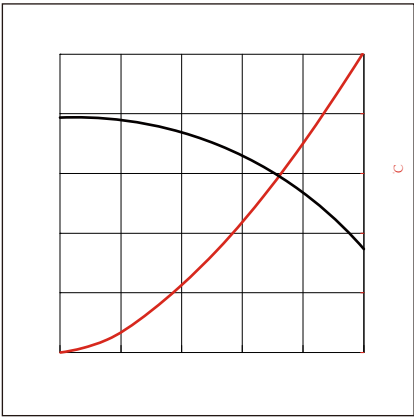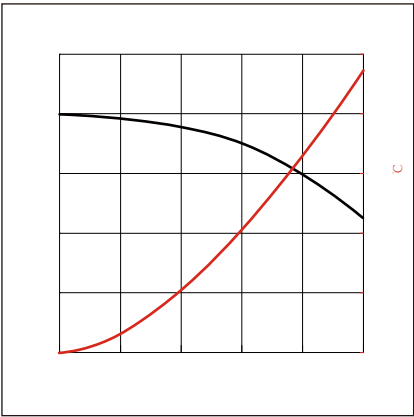

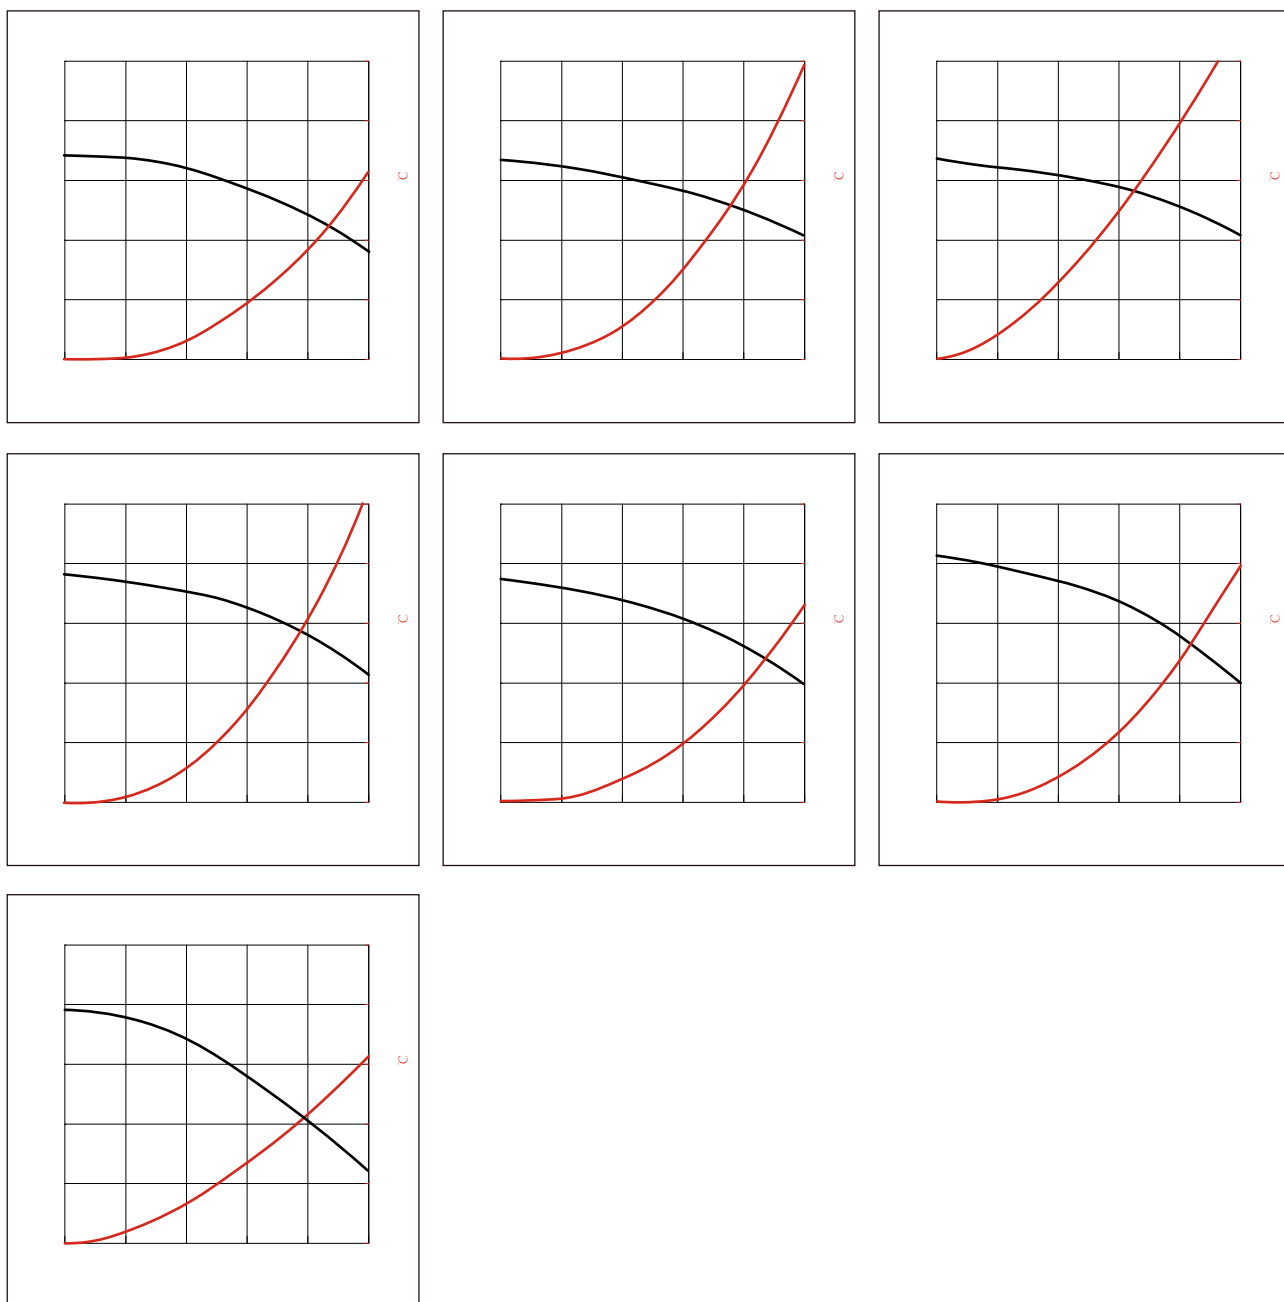


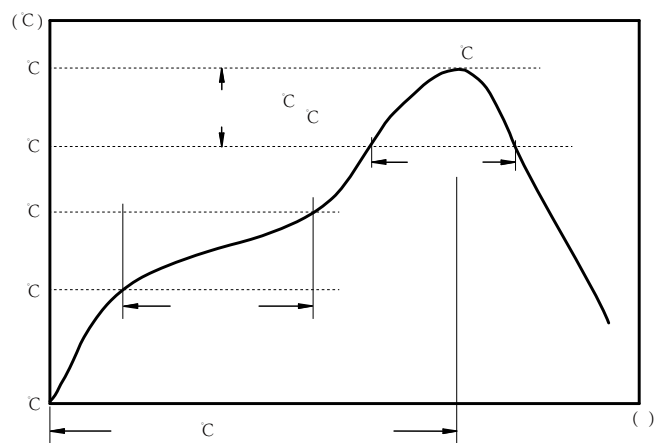

:


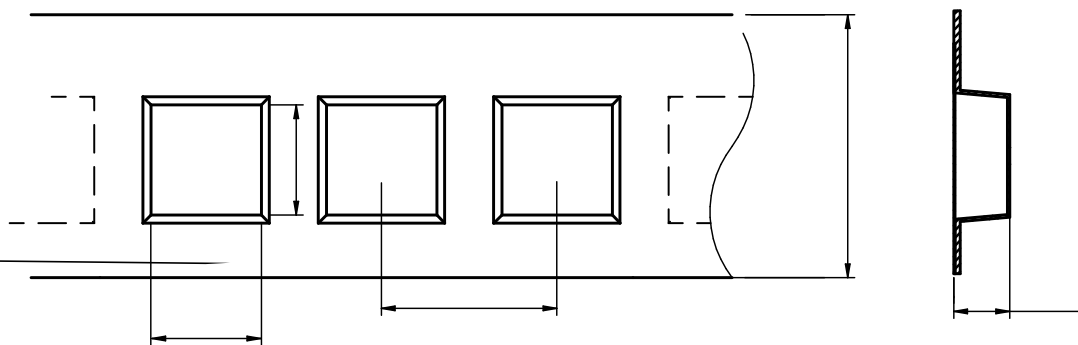


MDA1050	10.4 ± 0.1	11.6 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	16.0 ± 0.1	24.0 ± 0.3	5.4 ± 0.1	1.75 ± 0.1	0.40 ± 0.05

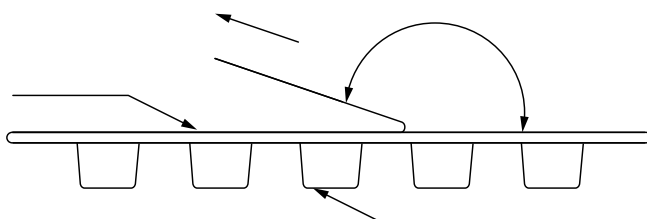


The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	KH+Printing Inductance+period)
---------	--------------------------------

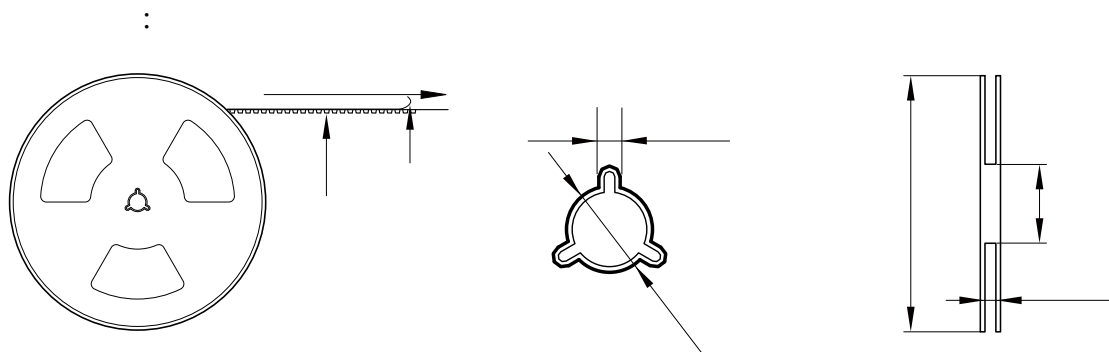

500 Pcs/Reel



2 Reel /Inner box(1000 Pcs)



3 Inner box/Carton box(3K Pcs)

:

•

•

•

•

•

•

•

•