


MDCA Series




FEATURES

- Shielded construction.
- Capable of corresponding high frequency.
- Low loss realized with low DCR.
- High performance (Isat) realized by Carbonyl Powder.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +125 °C(including self-temperature rise)
- Quantity:500pcs


APPLICATION


- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation

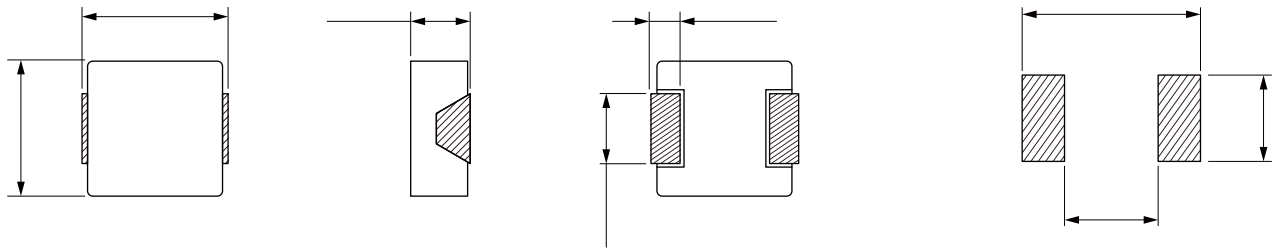


Part Number	Width (mm)	Height (mm)	Length (mm)	Thickness (mm)	Mounting Tab Width (mm)	Mounting Tab Spacing (mm)	Mounting Tab Height (mm)	Mounting Tab Length (mm)
MDCA1390-2R2M	2.2	±20%	43.5	40.0	52.5	47.0	2.30	2.70






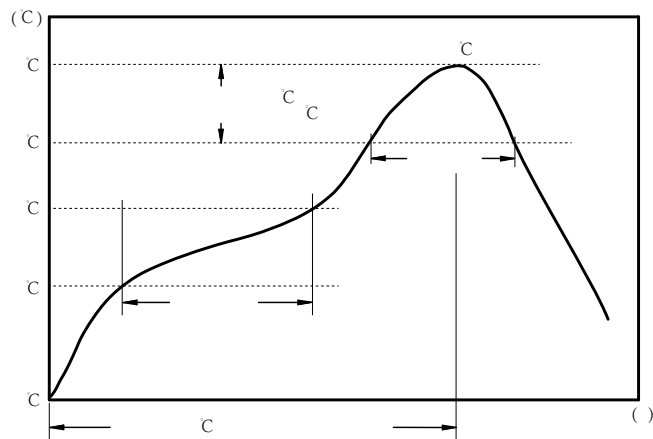

C
C
C


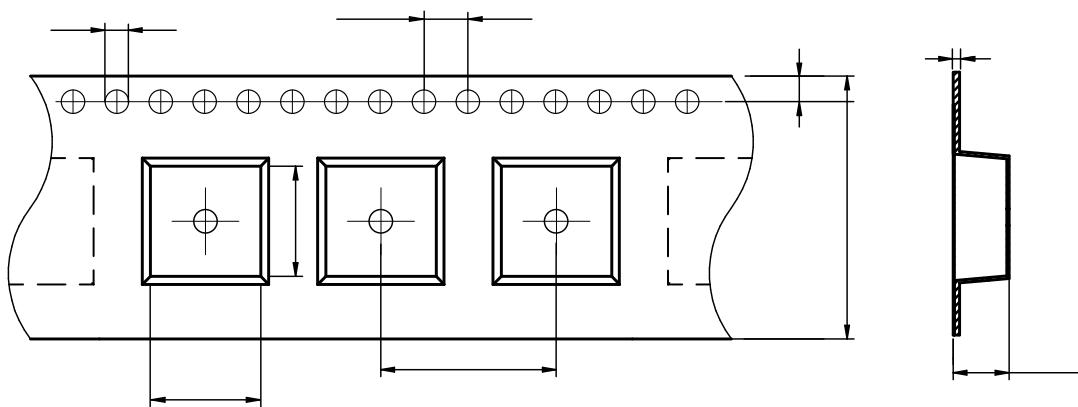


MDCA1390	12.95 ± 0.1	14.15 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	16.0 ± 0.1	24.0 ± 0.3	8.3 ± 0.1	1.75 ± 0.1	0.50 ± 0.05

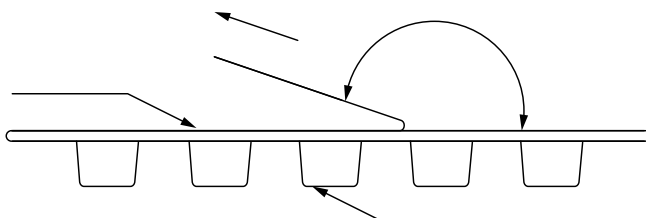


The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	Printing Inductance)
---------	----------------------

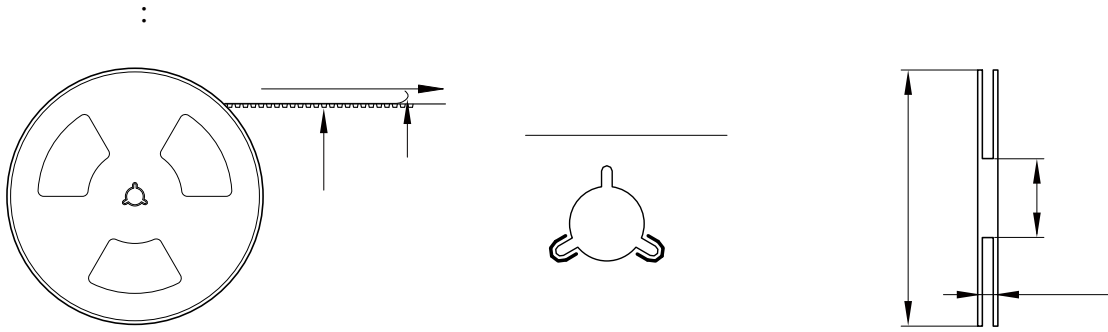

500 Pcs/Reel



2 Reel /Inner box(1000 Pcs)



2 Inner box/Carton box(2K Pcs)

:

•

•

•

•

•

•

•

•