



NRSA Series










	0.68	1.0	1.5	2.2	3.3	4.7
NRSA4030-R68N	0.68	±30%	6.80	4.60	1	
NRSA4030-1R0M	1.0	±20%	5.30	4.20	1	
NRSA4030-1R5M	1.5	±20%	4.90	3.40	2	
NRSA4030-2R2M	2.2	±20%	4.90	3.00	3	
NRSA4030-3R3M	3.3	±20%	3.30	2.40	4	
NRSA4030-4R7M	4.7	±20%	2.90	2.05	6	
NRSA4030-5R6M	5.6	±20%	2.60	1.95	6	
NRSA4030-6R8M	6.8	±20%	2.75	1.80	9	
NRSA4030-8R2M	8.2	±20%	2.10	1.60	9	
NRSA4030-100M	10	±20%	2.00	1.50	1	
NRSA4030-120M	12	±20%	1.80	1.30	1	
NRSA4030-150M	15	±20%	1.70	1.20	1	
NRSA4030-180M	18	±20%	1.50	1.10	2	
NRSA4030-220M	22	±20%	1.30	1.00	2	
NRSA4030-330M	33	±20%	1.10	0.85	3	
NRSA4030-470M	47	±20%	0.95	0.72	5	





I_R will cause the coil temperature rise approximately Δt40 °C

I_{SAT} will cause L to drop approximately 30% .

KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com




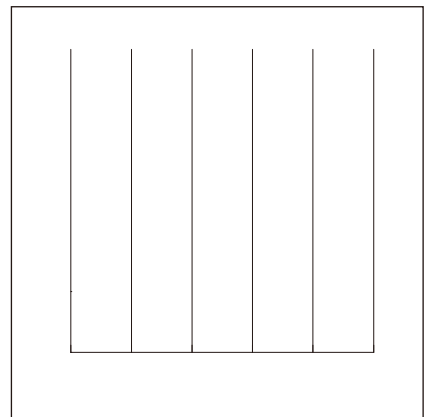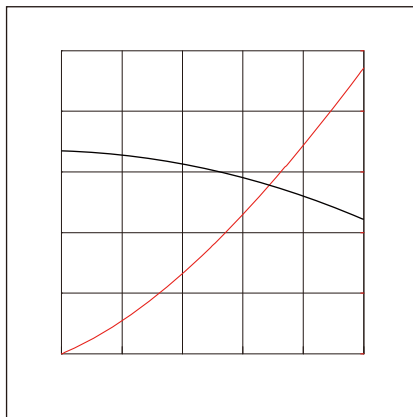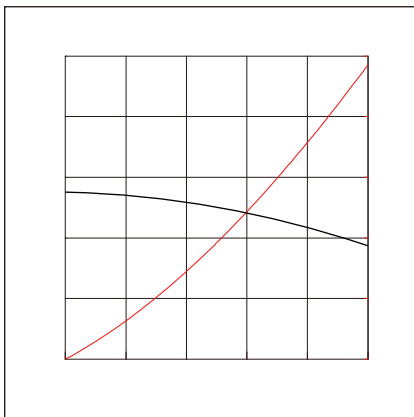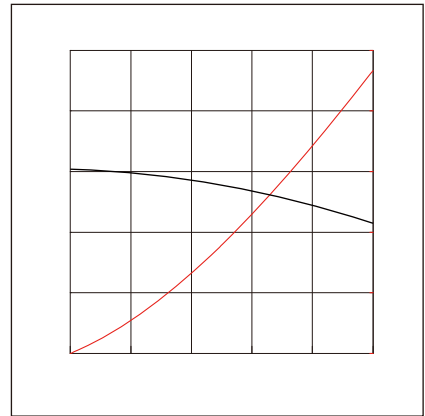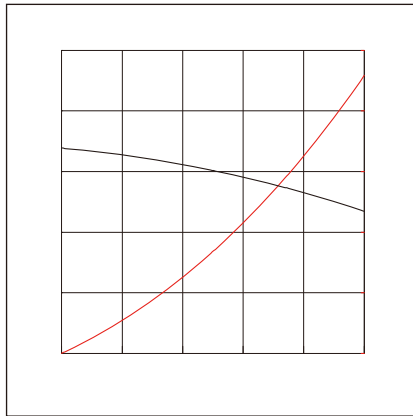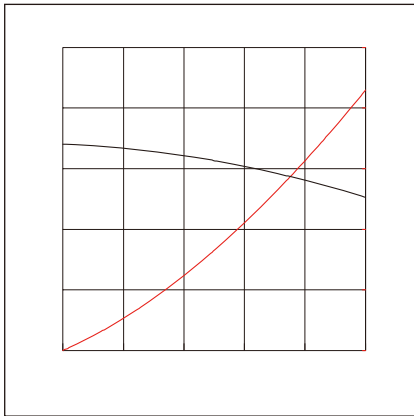

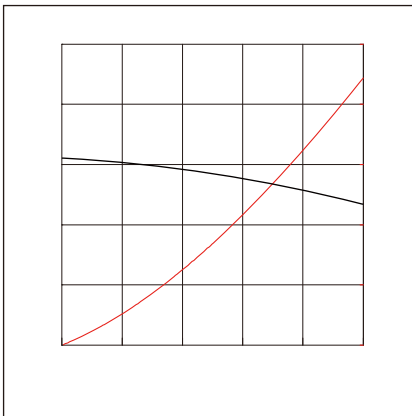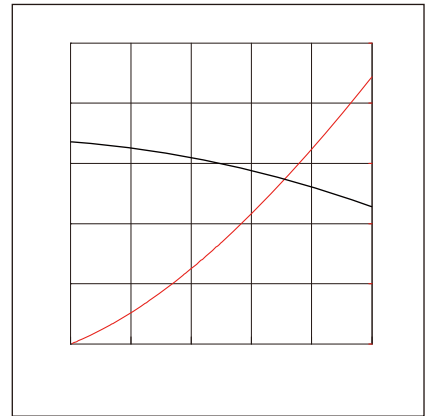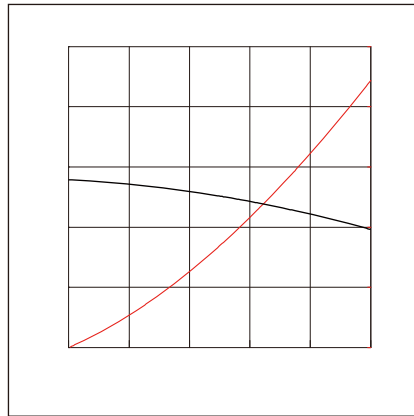
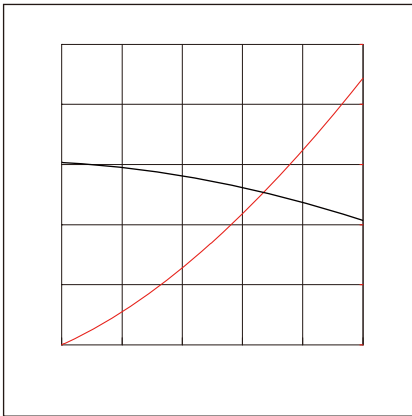


:


NRSA4030	4.25 ± 0.1	4.25 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.3	3.25 ± 0.1	1.75 ± 0.1	0.40 ± 0.05

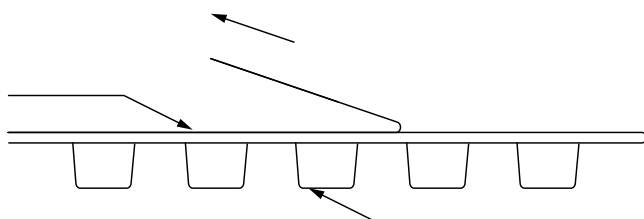


The peel force of top cover tape shall be between 0.3 to 1.17 N

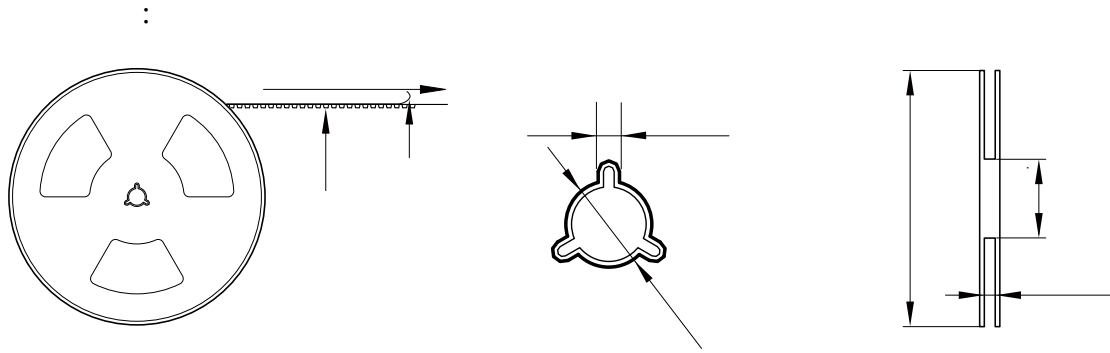

2000 Pcs/Reel



3 Reel /Inner box(6K Pcs)



3 Inner box/Carton box(18K Pcs)

-
-
-
-
-
-
-
-