

FBHE Series

SMD Suppression Ferrite Bead

Size 0402



CHARACTERISTICS


-
-
-
-
-

APPLICATION

-
-

Dimensions: [mm]

Land Pattern: [mm]

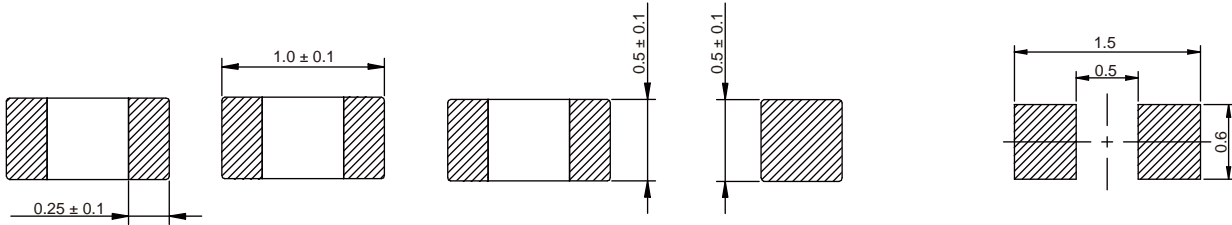

Electrical Properties:

| Part Number | Inductance (nH) | DC Resistance (mΩ) | Q Factor | Self-Resonant Frequency (MHz) |
|-------------------|-----------------|--------------------|----------|-------------------------------|
| FBHE0402-100-252R | 10 | | 0.05 | 2500 |
| FBHE0402-121-202R | 120 | | 0.095 | 2000 |
| FBHE0402-221-152R | 220 | | 0.15 | 1500 |
| FBHE0402-330-302R | 33 | | 0.022 | 3000 |
| FBHE0402-600-252R | 60 | | 0.032 | 2500 |
| FBHE0402-800-232R | 80 | | 0.038 | 2300 |

C

C

C

Impedance & Frequency Characteristics:

